

**UNI DISPLAY**  
ITS UNI DISPLAY FEATURE LETS YOU VIEW THE SET TEMPERATURE OF THE ROOM.

**GLOW LIGHT BUTTONS**  
GLOW IN THE DARK REMOTE BUTTONS TO GUIDE YOU WHEN IT'S DARK.


**SLEEP MODE**  
MAINTAINS A COMFORTABLE TEMPERATURE BY CUTTING EXCESSIVE COOLING AND POWER CONSUMPTION, SO YOU SLEEP COMFORTABLY ALL NIGHT.

**LOCK BUTTON**  
LOCK YOUR CURRENT SETTING USING THE LOCK BUTTON. TO UNLOCK, PRESS THE LOCK BUTTON AGAIN.

**CONVENIENCE**

**SILENT OPERATION**  
COOLS SUPER SILENTLY.

**MULTI STAGE FILTRATION ADVANTAGE**  
REMOVES ALLERGENS, ODOURS AND OTHER HARMFUL PARTICLES TO GIVE YOU COOL AND FRESH AIR.

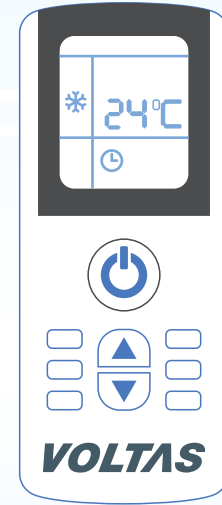

**ECO MODE**  
OPTIMIZES THE POWER CONSUMPTION AND SAVES ON YOUR ELECTRICITY BILLS.

**SELF DIAGNOSIS**  
ABNORMALITIES AND FAILURES ARE CHECKED BY THE AC AND ERROR CODE IS DISPLAYED.

**VOLTAS allweather™**



**HIGH AMBIENT COOLING**

**ACTIVE DEHUMIDIFIER**

**INSTANT COOLING**

Voltas 24x7 Customer Service - 1860 599 4555, 9650694555. For product registration SMS <WTA> to 9289525321. Buy only genuine Voltas stabilizers.

Visit us at [www.myvoltas.com](http://www.myvoltas.com) To locate your nearest store. log on to: [www.myvoltas.com/store-locator](http://www.myvoltas.com/store-locator)

Follow us at [My Voltas](#) [My Voltas](#) [My Voltas](#)

**CORPORATE HEAD OFFICE:** Voltas Limited, Voltas House A, Dr. Babasaheb Ambedkar Road, Chinchpokli, Mumbai - 400033. Phone: 022-66566866. **BRANCHES:** DELHI: Voltas Limited, A-43, Mohan Co-operative Industrial Estate, Mathura Road, New Delhi - 110044. Phone: 011-66525550. HARYANA: Voltas Limited, A-43, Mohan Co-operative Industrial Estate, Mathura Road, New Delhi. Phone: 011-66525552. GHAZIABAD: Voltas Limited, D-15, R.S. Plaza, 3rd Floor, Raj Nagar, RDC, Ghaziabad - 201001. Ph. 0120-6404001. CHANDIGARH: Voltas Limited, Plot No. 194-195, First Floor, Industrial Area Phase-2, Chandigarh - 160002. Phone: 0172-4111800. LUCKNOW: Voltas Limited, Shalimar Titanium, Block-C, 4th Floor, Office Nos. 410 + 412, Plot No. TCG-1/11, Opp. Indira Gandhi Pratishthan, Vibhuti Khand, Gomti Nagar, Lucknow - 226 010. Phone: 0522-6566961. JAIPUR: Voltas Limited, Diamond Tower, 201-203, Purani Chungi, Ajmer Road, Jaipur-302021. Phone: 0141-2972076. HYDERABAD: Voltas Limited, 7-2-1735, Sanath Nagar, Hyderabad-500018. Phone: 040-56743001. VJAYAWADA: Voltas Limited, #29-27, Bhagat Singh Road, Next to Naadars Function Hall, Sityanarayanasapuram, Vijayawada - 520011. For Institutional Enquiry - 8198052052. BANGALORE: Voltas Limited, 7th Floor, 701-Pride Hubli 116, Labagh Road, Bangalore-560027. Phone: 08022556565. CHENNAI: Voltas Limited, No. 624, Anna Salai, Chennai - 600018. Phone: 067033311. KOCHI: Voltas Limited, Ambalal building, 30/322, M.G. Road, Ranganam, Kochi-682016. Phone: 0484-6605555. COIMBATORE: Voltas Limited, 1413, Trichy Road, Coimbatore - 641018. Phone: 0422-8502419/6530080. MUMBAI: Voltas Limited, Voltas House B, 2nd Floor, T.B. Kadam Marg, Chinchpokli, Mumbai - 400033. Phone: 022-66565333. PUNE: Voltas Limited, Equatorial Forum, 2nd & 3rd Floor, Mumbai-Pune Road, Wakadewadi, Pune - 411033. Phone: 020-96011776. THANE: Voltas Limited, Unit H, 1st Floor, 2nd Polkhan Road, Thane-400901. Phone: 022-47920106/07. MADURAI: Adnam Trade Center, 5th Floor, Plot No. 38, Dhaga Layout, Near Crazy Castle, Nagpur - 440010. Phone: 9623208896. AHMEDABAD: Voltas Limited, A-301, Shivaji Corporate Park, Shivranjani Crossroad, Satellite, Ahmedabad-380015. Phone: 079-46301100/015. INDORE: 501-45, 5th Floor, NRI Business Park, Block B-1, P.U.A. Scheme-54 Vijay Nagar Square, A.B.Road, Indore-452010. M.P., Phone: 0731-4043512 & 4046393. RAIPUR: Voltas Limited, Kunwar Ben Karsam Bhai Chamber, Shop No. 419/420, 4th Floor, New Timber Market, Mandi Market, Devendra Nagar, Raipur - 492001. Ph: 4033886. KOLKATA: Voltas Limited, Unit No. 805, 8th Floor, Gooding Waterside Tower - 2, Plot No. - 5, Block DP, Sector - V, Salt Lake, Kolkata - 700091. Phone: 033-6626260-265. For Institutional Inquiry - 9771491152. PATNA: Voltas Limited, Mahanagar Complex, 30th A, 3rd Floor, Frazier Road, Patna-800001. For Institutional Inquiry - 7091091400 / 7707098848. JAMSHEDPUR: Voltas Limited, Voltas House, 3rd Floor, Main Road, Bistapur, Jamshedpur - 831001. Phone: 0657-6455691. For Institutional Inquiry - 065459877 / 0657-6522379. BHUBANESWAR: Voltas Limited, B-15, 2nd Floor, Arisht Plaza, Shahadeo Nagar, Bhubaneswar-751007. Phone: 0674-2544919/18. For Institutional Inquiry - 09937140010. GUWAHATI: Voltas Limited, Uppasana Palace Building, 6th Floor, Dr. Rajendra Prasad Road, Near Ganesh Mandir, Ganeshguri, Guwahati - 781006. For Institutional Inquiry - 9706962626.

© Voltas Ltd. adheres to the E-Waste (Management & handling) Rules 2011 notified by the Ministry of Environment and Forests, Government of India. This product has been manufactured with high quality parts and materials which can be reused and are suitable for recycling. Do not dispose of the waste product with normal domestic and other wastes at the end of its service life. For more information on Voltas E-Waste and exchange policy please contact Voltas 24x7 Customer Service - 1860 599 4555, 9650694555. \*Features are available in select models only. T & C apply. As a continuing policy of product innovation at Voltas, the design and specification are subjected to change without prior notice.

A TATA Product

**VOLTAS**


Bring Home All-Year Comfort And Convenience




**VOLTAS allweather™**

VOLTAS ALL WEATHER WINDOW AC RANGE 2020

INDIA'S NO.1 AC BRAND

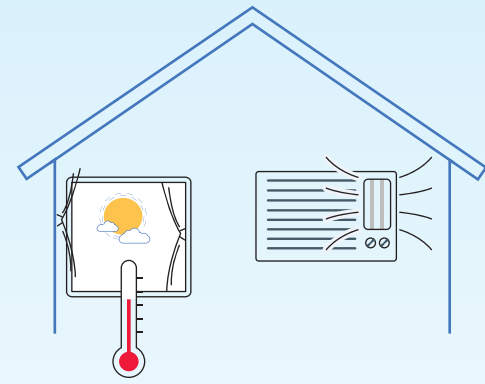


**HIGH AMBIENT COOLING**  
GIVES YOU INSTANT COOLING AT EVEN 50°C.

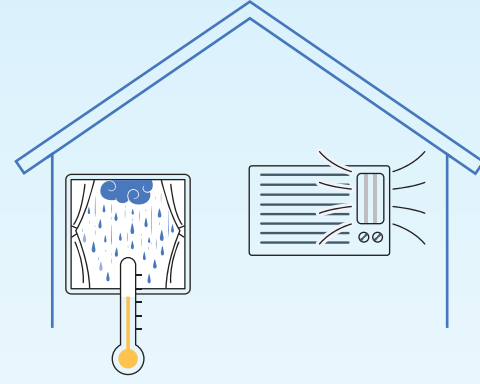


**ACTIVE DEHUMIDIFIER**  
CONTROLS THE INDOOR HUMIDITY  
IN MONSOON.


## LEADERS IN AC TECHNOLOGY

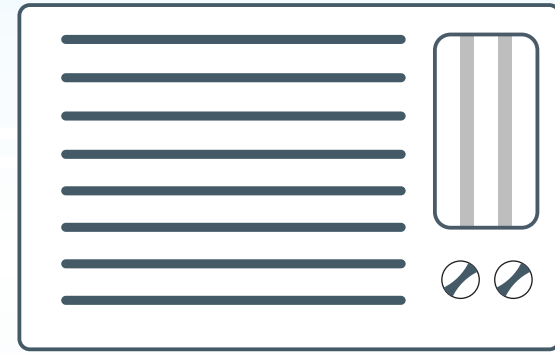


## COMFORT

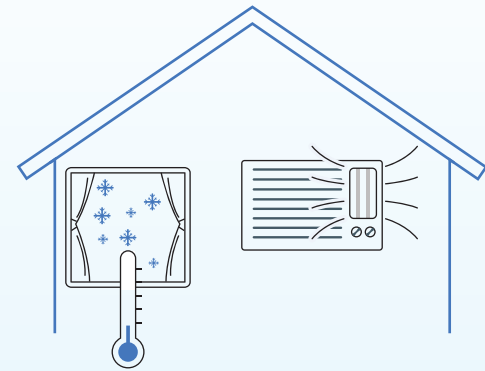

**INTELLIGENT HEATING**  
KEEPS YOU WARM AND  
COMFORTABLE DURING WINTERS.

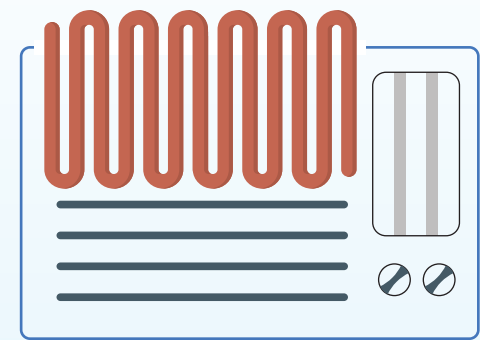

**100% COPPER**  
COPPER CONDENSER COIL IS MORE  
DURABLE & DELIVERS EFFICIENT COOLING.

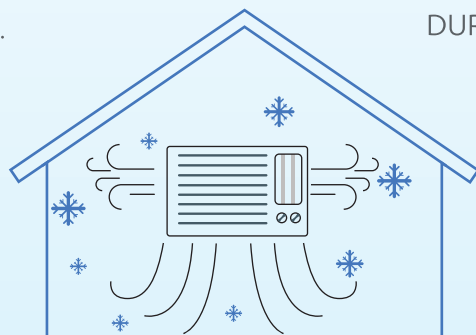

**INSTANT COOLING**  
TURBO MODE COOLS  
THE ROOM INSTANTLY.

## TECHNICAL SPECIFICATION FOR WINDOW AC

### 2 STAR



Model	Unit	Voltas WAC 102 EZQ(R-410A)	Voltas WAC 242 LZH(R32)
Star Rating	Stars	2	2
Rated Cooling Capacity (100%)	Watt	2550	5800
Rated Current-Cooling	Amps	4.1	9.2
Rated Power Input-Cooling (100%)	Watt	927	2108
Rated ISEER	W/W	2.75	2.75
Power Supply	V/Hz/Ph	230 / 50 / 1 Phase	230 / 50 / 1 Phase
Air Flow Volume - Indoor	CMH	330/300/260	720
*Noise Level - Indoor	dB(A)	51/47.5/46.5	58
Operation		LCD Remote	Non LCD Remote
Compressor Type		High EER Rotary	High EER Rotary
Max Operating Ambient Temp Range		50° C	50° C
Refrigerant		R-410A	R-32
Unit Dimension (WxHxD)	mm	450x346x535	660x430x805
Unit Net / Gross Weight	Kg	28/30.2	60/65.5
Condenser Coil		Copper	Copper
Filters		Anti Dust	Anti Dust
Auto Restart		Yes	Yes
Energy Saver		-	Yes
Self Diagnosis		Yes	Yes

### 3 STAR



Model	Unit	Voltas WAC 123 DZS(R32)	Voltas WAC 123 LZP(R32)	Voltas WAC 183 CZP(R32)	Voltas WAC 183 DZA(R32)	Voltas WAC 183 MZD(R32)
Star Rating	Stars	3	3	3	3	3
Rated Cooling Capacity (100%)	Watt	3100	3200	4800	4800	4800
Rated Current-Cooling	Amps	4.6	4.7	7.2	7.1	7.1
Rated Power Input-Cooling (100%)	Watt	1050	1073	1649	1610	1605
Rated ISEER	W/W	2.95	2.98	2.91	2.98	2.99
Power Supply	V/Hz/Ph	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase
Air Flow Volume - Indoor	CMH	500	400	700	700	700
*Noise Level - Indoor	dB(A)	56	54	56	54	54
Operation		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
Compressor Type		High EER Rotary	High EER Rotary	High EER Rotary	High EER Rotary	High EER Rotary
Max Operating Ambient Temp Range		50° C	50° C	50° C	50° C	50° C
Refrigerant		R-32	R-32	R-32	R-32	R-32
Unit Dimension (WxHxD)	mm	558x375x580	600x385x570	660x430x750	660x430x705	660x430x705
Unit Net / Gross Weight	Kg	40/45	39/43	55/61	52/58	52/58
Condenser Coil		Copper	Copper	Copper	Copper	Copper
Filters		Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration
Auto Restart		Yes	Yes	Yes	Yes	Yes
Energy Saver		Yes	Yes	Yes	Yes	Yes
Self Diagnosis		Yes	Yes	Yes	Yes	Yes

\*Noise level reflects the levels in Anechoic Chamber. All above performance data are as per IS 1391 Rated conditions. As a continuing policy of product innovation at Voltas, the design and specification are subjected to change without prior notice. Product images are for illustrative purposes only and may differ from the actual product

### 5 STAR



Model	Unit	Voltas WAC 125 DZA(R32)	Voltas WAC 155 DZA(R32)	Voltas WAC 185 DZA(R32)	Voltas WAC 185 LZH(R32)	Voltas WAC 185 MZK(R32)
Star Rating	Stars	5	5	5	5	5
Rated Cooling Capacity (100%)	Watt	3520	3800	5050	5000	5000
Rated Current-Cooling	Amps	4.6	5.1	6.7	6.5	6.6
Rated Power Input-Cooling (100%)	Watt	1050	1144	1525	1492	1500
Rated ISEER	W/W	3.35	3.32	3.31	3.35	3.33
Power Supply	V/Hz/Ph	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase
Air Flow Volume - Indoor	CMH	650	700	700	750	700
*Noise Level - Indoor	dB(A)	53	53	54	54	54
Operation		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
Compressor Type		High EER Rotary	High EER Rotary	High EER Rotary	High EER Rotary	High EER Rotary
Max Operating Ambient Temp Range		50° C	50° C	50° C	50° C	50° C
Refrigerant		R-32	R-32	R-32	R-32	R-32
Unit Dimension (WxHxD)	mm	660x430x705	660x430x705	660x430x775	660x430x805	660x430x805
Unit Net / Gross Weight	Kg	47.5/52.5	49/54	57/63	59/64.5	59/64.5
Condenser Coil		Copper	Copper	Copper	Copper	Copper
Filters		Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration	Dual Stage Filtration
Auto Restart		Yes	Yes	Yes	Yes	Yes
Energy Saver		Yes	Yes	Yes	Yes	Yes
Self Diagnosis		Yes	Yes	Yes	Yes	Yes

## INTELLIGENT HEATING



Model	Unit	Voltas WAC 18H CZP
Rated Cooling Capacity	Btu/Hr.	18000
Rated Heating Capacity	Btu/Hr.	18000
Rated Current-Cooling	Amps	8.2
Rated Current-Heating	Amps	8.2
Rated Power Input-Cooling	Watt	1800
Rated Power Input-Heating	Watt	1800
Power Supply	V/Hz/Ph	230 / 50 / 1 Phase
Air Flow Volume - Indoor	CMH	700
*Noise Level - Indoor	dB(A)	58
Operation		LCD Remote
Compressor Type		High EER Rotary
Operating Ambient Temp Range		0° C - 46° C
Refrigerant		R-32
Unit Dimension (WxHxD)	mm	660x430x750
Unit Net / Gross Weight	Kg	55/61
Condenser Coil		Copper
Filters		Anti Dust
Auto Restart		Yes
Energy Saver		Yes
Self Diagnosis		Yes